



SSFL Overview
Fairfield Community Liaison Group



Welcome

- Introductions
- Apologies

15A2 Endeavour Energy Underline crossing, Longfield Street to McBurney Road.

- These works have now been completed.

Cabramatta Sewer Realignment, Broomfield Street

- Phase one works completed. This involved the installation of new sewer main pipe, construction of manholes, reinstatement of asphalt and line marking.
- The road and parking bays on Broomfield Street have now been opened.
- Anticipated connection in October subject to Sydney Water crew availability.
- Phase 2 works to start after the new line is connected to the existing line.
- Phase 2 works will involve the installation of a vent shaft in the existing Rail Corp carpark and will take approximately 2 weeks to complete.

Cabramatta Station

- Station work is continuing with work to the platforms.
- Broomfield Street near Longfield Street works to commence. Expected duration is 6 weeks.
- Paving and kerbing to be undertaken after completion of the Broomfield Street Sewer Diversion Works.



Out of Hours Work

Location of Works: The Horsley Drive, Villawood.

Time: 7am to 6pm Saturday 24 September, and 5am to 6pm Sunday 25 September 2011. A contingency weekend between 7am and 6pm Saturday, and 5am and 6pm Sunday in October 2011.

Activity: Installing new power poles and conductors, and stringing conductors across The Horsley Drive.

Equipment: Non-destructive digging truck, pole truck, two elevated work platforms, franna crane, traffic control truck, and powered and non-powered hand tools.

Location of Works: Construction work from Leightonfield Station to Carramar Station.

Time: From 7am to 6pm on Saturday and from 8am to 6pm on Sunday for four weekends between 15 October and 25 December 2011.

Activity: Installation and removal of power poles and associated aerial works.

Equipment: Non-destructive digging truck, pole truck, two elevated work platforms, franna crane, and powered and non-powered hand tools.

Location of Works: Broomfield St, between Fisher St and Cabramatta Rd West, Cabramatta

Time: Two nights (either weekday or weekend) from 6pm to 6am, between 3 September and 31 October 2011, and a third contingency night.

Activity: Sewer connections, involving saw cutting and jack hammering the existing main, connection and reinstatement.

Equipment: Lighting tower, 7t excavator, tip truck, hiab tipper, wacker packer, concrete truck, jack hammers, compressor, back hoe, water pump, road sweeper, powered hand tools and sewer tankers (contingency only).

Location of Works: Wattle Avenue, Villawood.]

Time: From 7am to 6pm on Saturday and from 8am to 6pm on Sunday on one weekend between 1 October and 18 December 2011. A contingency is in place for a second weekend during this time period.


Activity: Trimming and removal of trees to allow for the installation of the proposed aerial HV route.

Equipment: Elevated work platform, crane truck, tree mulcher, medium rigid truck and powered hand tools.

- CLG's
- Letterbox drops
- Individual briefings (only in noise sensitive areas as defined by the noise report)
- Respite Offers (only in noise sensitive areas as defined by the noise report)
- Alternate Accommodation (only in noise sensitive areas as defined by the noise report)

Cabramatta Station Exeloo

- RailCorp are still liaising between RailCorp and Integral Energy in regards to the opening of the Exeloo.
- Action from August CLG minutes: Stations First and ARTC investigation confirmed that the signs are still on display advising the public of the closure and other available public amenities in the vicinity of the station.

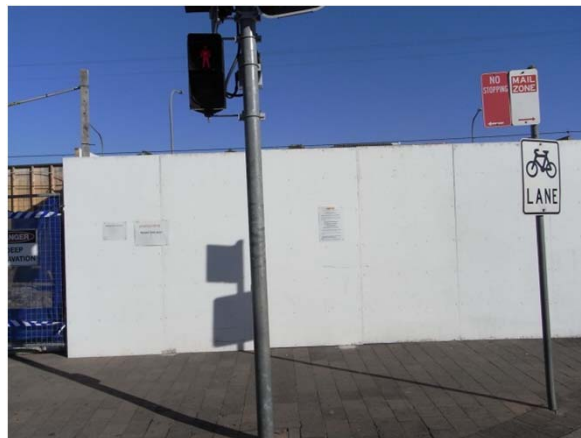

Cabramatta Station Art (Deflection Wall)

- Popperbox is currently pricing the material and installation.
- The final design “The Journey” is nearing completion.
- “The Journey” still requires submission of the work methodology for safe installation, to be approved by ARTC.

Noise Walls

- Two noise wall designs have been received by ARTC, currently under review.
- After approval from ARTC, Krystyna Cyron from the Polish Hall will choose one of the designs to be placed on the noise walls for Fairfield LGA.

Once both the designs have been approved by ARTC they will be presented to Fairfield CLG for information.

Next meeting:

Wednesday 5 October 2011

- SSFL Information Line: 1800 182 543
- Email address: ssfl@artc.com.au
- Website: www.ssfl.artc.com.au