



AUSTRALIAN RAIL TRACK CORPORATION LTD


## Southern Sydney Freight Line IMPORTANT COMMUNITY INFORMATION

### Regents Park, Sefton and Birrong – Weekend Works

Australian Rail Track Corporation (ARTC) will be undertaking construction work in your area. These works must be undertaken outside normal construction hours because of the safety risks involved with working in close proximity to overhead power and rail track.


#### Rookwood Cemetery to Auburn Road, Regents Park

The works will be undertaken on Saturday 29 and Sunday 30 January 2011 from 7am to 6pm. The works will include installing signal posts and modifying track circuits. The equipment required for these works will include site vehicles, hand tools, hi-rail crane truck, and hi-rail telehandler.

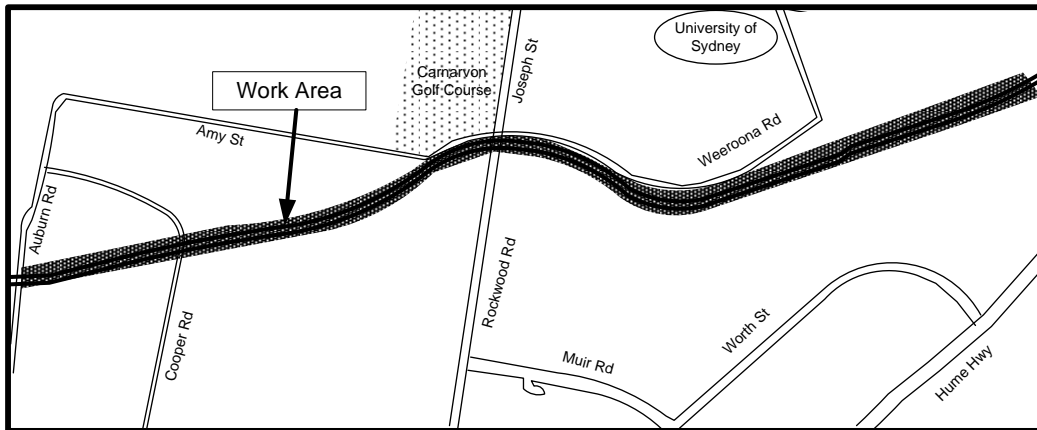


#### Joseph St, Lidcombe to Auburn Road, Regents Park

The works will be undertaken on Saturday 29 January 2011 from 7am to 6pm, with a contingency period from 4am to 7am on Saturday 29 and from 4am to 6pm on Sunday 30 January 2011. This early morning contingency may be required as these works can only be undertaken when the track temperature is below 35 degrees Celsius. The works will include installing cable insulation joints. The equipment required for these works will include two front end loaders, hand tools, oxy torch, grinder, welding equipment and water cart.

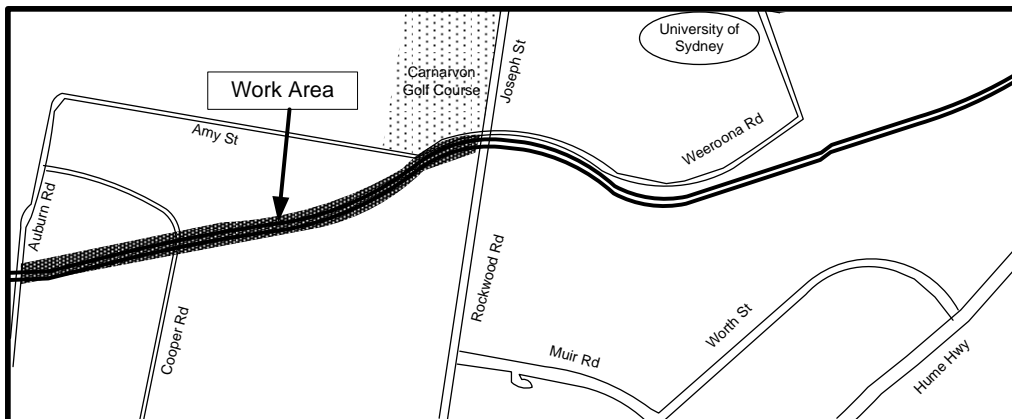


#### Cooper Road Overbridge, Birrong

The works will be undertaken on Saturday 29 and Sunday 30 January 2011 from 6am to 7pm. The works will include piling and installing anchors underneath Cooper Road Overbridge, and constructing a dish drain and concrete top slab. The equipment required for these works will include a 20t piling rig, rock nailing rig, two 33m concrete boom pumps, two concrete line pumps, wacker packer, dump truck with rubber tyres, 12t tipper, 14t mobile excavator, 7t mini excavator, concrete delivery trucks and hand tools. There will also be a jack hammer used between 9am and 5pm on Saturday only.

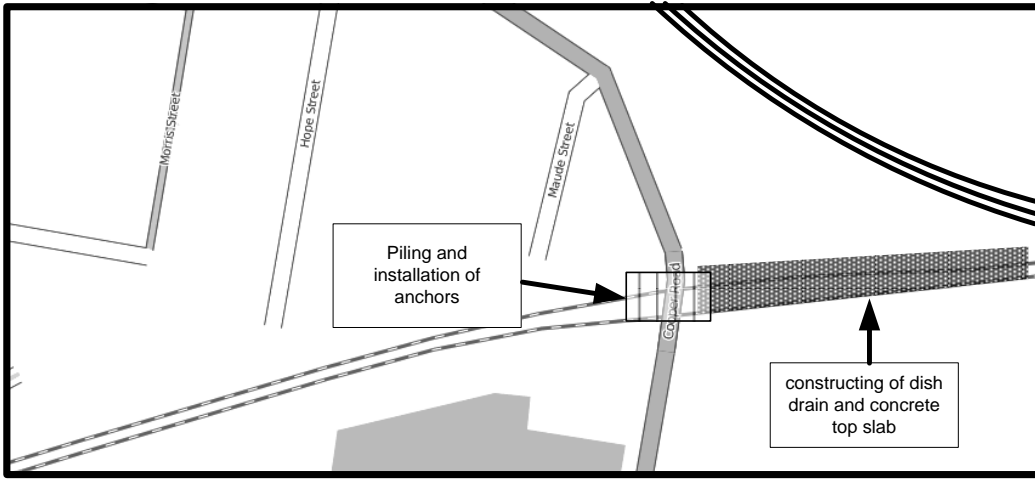


**Cooper Road to Gascoigne Road, Birrong**

The works will be undertaken from 7am to 6pm on Saturday 29 and from 8am to 6pm on Sunday 30 January 2011. The works will include formation construction in close proximity to the track. The equipment required for these works will include a 20t excavator, bogies and hand tools.

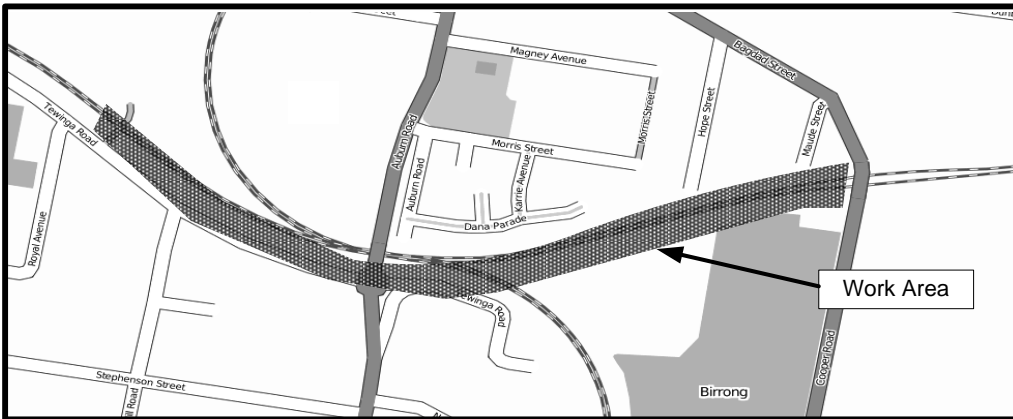


**Cooper Road to Woods Road, Birrong**

The works will be undertaken on Saturday 29 and Sunday 30 January 2011 from 7am to 6pm. The works will include installing a new wire run and reprofiling overhead wiring. The equipment required for these works will include two hi-rail cherry pickers, two Manitou cranes, hi-rail scissor lift, hi-rail crane truck and hand tools.

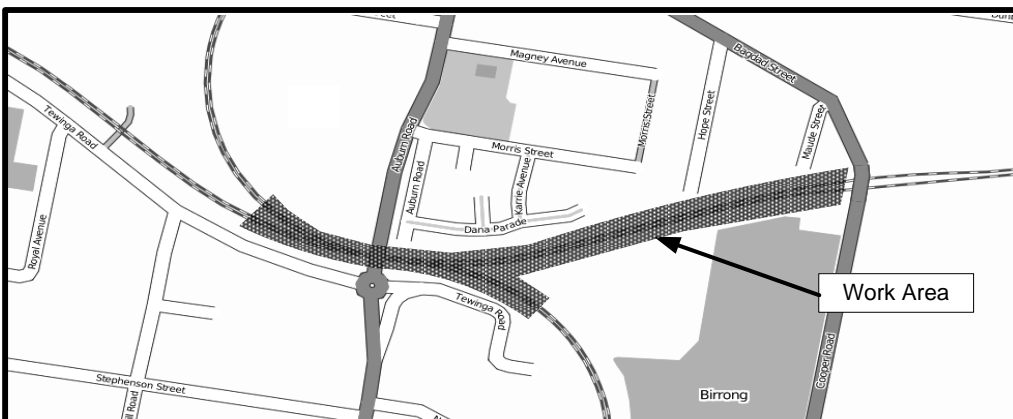


**Wellington Road, East of Woods Road, Birrong**

The works will be undertaken from 7am to 6pm on Saturday 29 and from 8am to 6pm on Sunday 30 January 2011. The works will include piling, earthworks, and installing a protection slab. The equipment required for these works will include a 2.5t low height piling rig, 15t bored piling rig, concrete pump, two 7t excavators, two tipper trucks, concreted delivery trucks and pole crane truck.

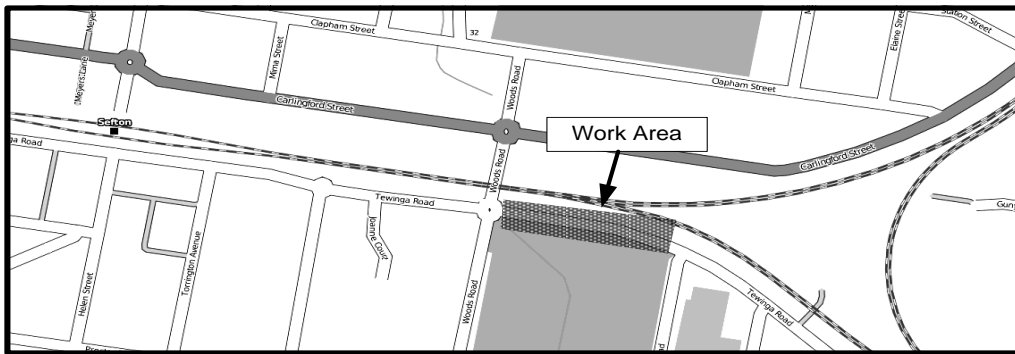


### Teresa Street to Woods Road, Birrong

The works will be undertaken on Saturday 29 and Sunday 30 January 2011 from 6am to 8pm, with a contingency period from 8pm Saturday 29 to 6am Sunday 30 January. The works will include loading, transporting and lifting girders. The equipment required for these works will include a 100t mobile crane, 50t mobile crane, 20t Franna, three girder transportation vehicles, three crane support vehicles, two elevated work platforms, 5t excavator, two tipper trucks, four mobile flood lights and a compressor.

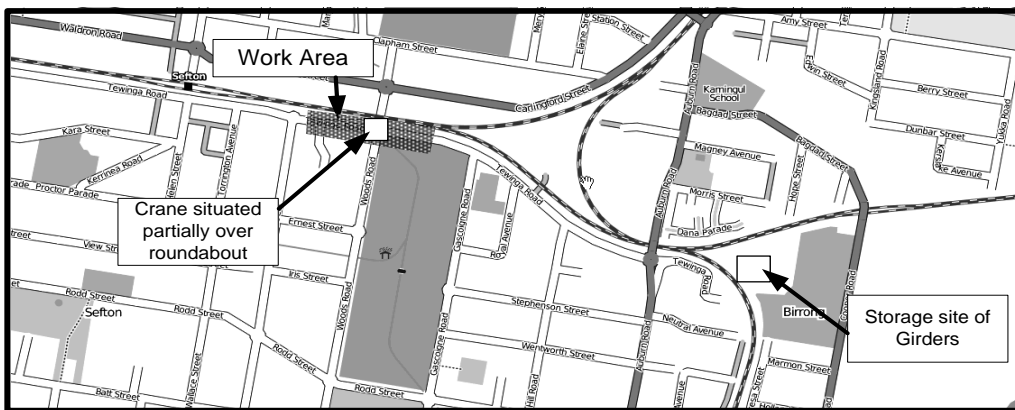


### Woods Road, Birrong to Hector Street, Chester Hill

The works will be undertaken from 7am to 6pm on Saturday 15, 22 and 29 and from 8am to 6pm on Sunday 16, 23 and 30 January 2011. The works will consist of installing noise barriers. The equipment required for these works will include a 20t Franna, elevated work platform, Hiab truck, 5t excavator and hand tools.

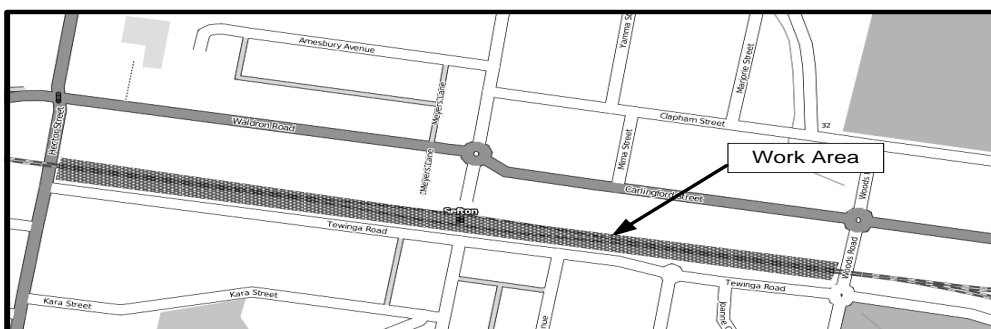


### Woods Road, Birrong to Woodville Road, Villawood

The works will be undertaken from 6am Saturday 29 to 6pm Sunday 30 January 2011. The works will include excavating, laying and backfilling stormwater drainage pipes. The equipment required for these works will include three 12t mobile excavators, three bogie tippers, three wacker packers, concrete trucks and hand tools.

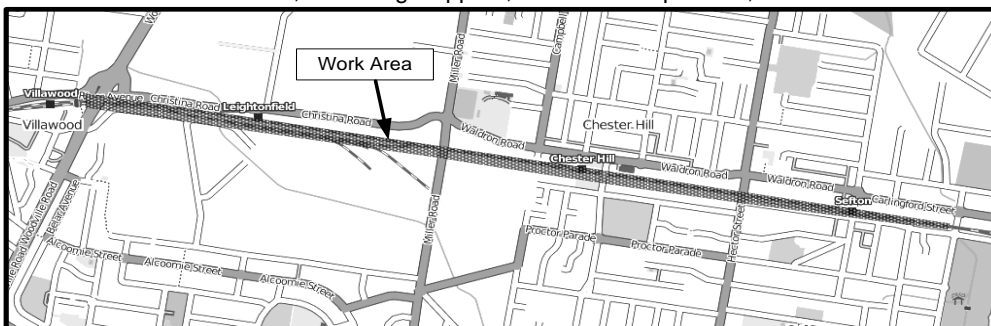


### Wellington Road, Birrong

The works will be undertaken from 7am to 6pm on Saturday 29 and from 8am to 6pm on Sunday 30 January 2011. The works will consist of constructing a reinforced soil wall. The equipment required for these works will include a front end loader, 5t excavator, bogies and hand tools.

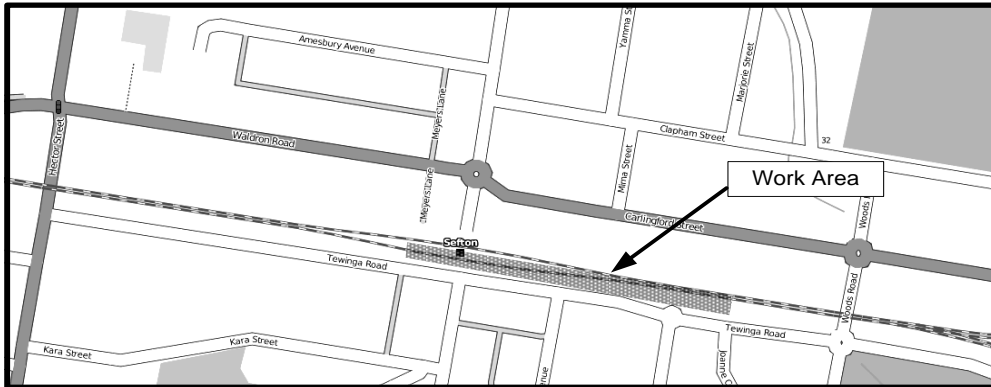


### Sefton Station

The works will be undertaken from 7am to 6pm on Saturday 29 and from 8am to 6pm on Sunday 30 January 2011, with a contingency period from 6pm to 10pm on both days. The works will include upgrading power, cladding and glazing to lift shafts, and working on the family accessible toilets and throw screens. The equipment required for these works will include a delivery truck, oxy sets, generator, 60t crane, 20t Franna, day maker lights, compressor, jack hammers, and powered and non-powered hand tools.

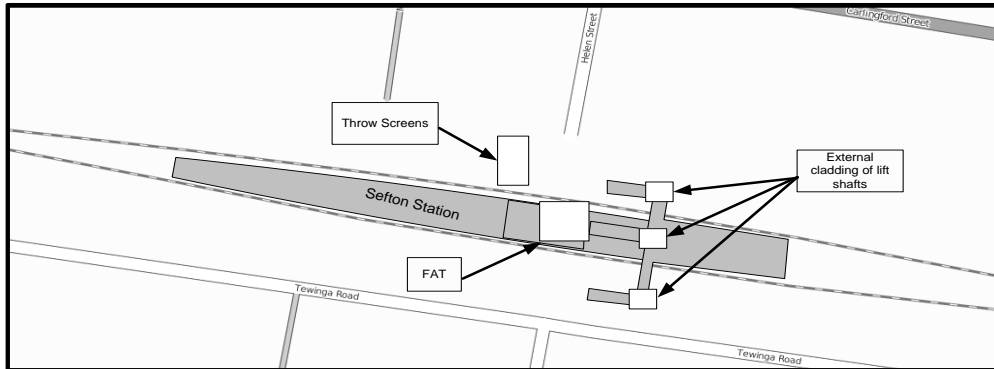

### Hector Street, Chester Hill

The works will be undertaken from 7am to 6pm on Saturday 29 and from 8am to 6pm on Sunday 30 January 2011. The works will consist of removing sheet piles. The equipment required for these works will include a 25t excavator, bogies and hand tools.

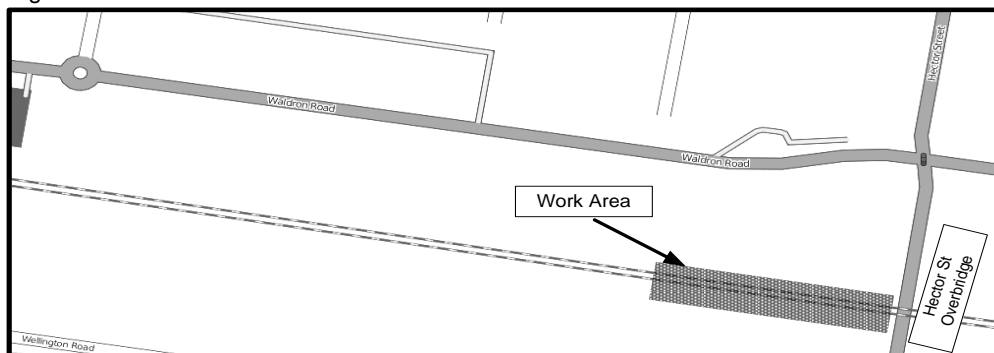

We appreciate your patience while we build this important project for Sydney, NSW and the nation.

**For Further information** - Please phone our **24 Hour Information and Complaints Line on 1800 182 543** or Email [ssfl@artc.com.au](mailto:ssfl@artc.com.au) or Visit [www.ssfl.artc.com.au](http://www.ssfl.artc.com.au)



Translating & Interpreting Service – Please Phone: 131 450