



AUSTRALIAN RAIL TRACK CORPORATION LTD

## Southern Sydney Freight Line IMPORTANT COMMUNITY INFORMATION


### Construction Work at Sefton Station and from Hector Street, Chester Hill to Woodville Road, Villawood

Australian Rail Track Corporation (ARTC) will be undertaking construction work at Sefton Station and from Hector Street, Chester Hill to Woodville Road, Villawood. This work must be undertaken outside normal construction because there are safety risks involved with working in close proximity to the overhead wires and tracks.

#### Sefton Station


Work in this area will include a power upgrade, glazing and cladding to the lift shafts, installing the family accessible toilet, strengthening the bridge and working on throw screens. The work will be undertaken from 7am to 6pm Saturday 9 April, 8am to 6pm Sunday 10 April and 6pm to 8pm Monday 11 April to Wednesday 13 April 2011. Should the works not be completed on these dates, the contingency times for work are from 6pm to 10pm on Saturday 9 April and Sunday 10 April 2011.

The equipment used to complete these works include a delivery truck, oxy sets, a 60t crane, a 20t franna, scaffolding, an elevated work platform, a power drill, a drop saw, a power saw, and hand tools.

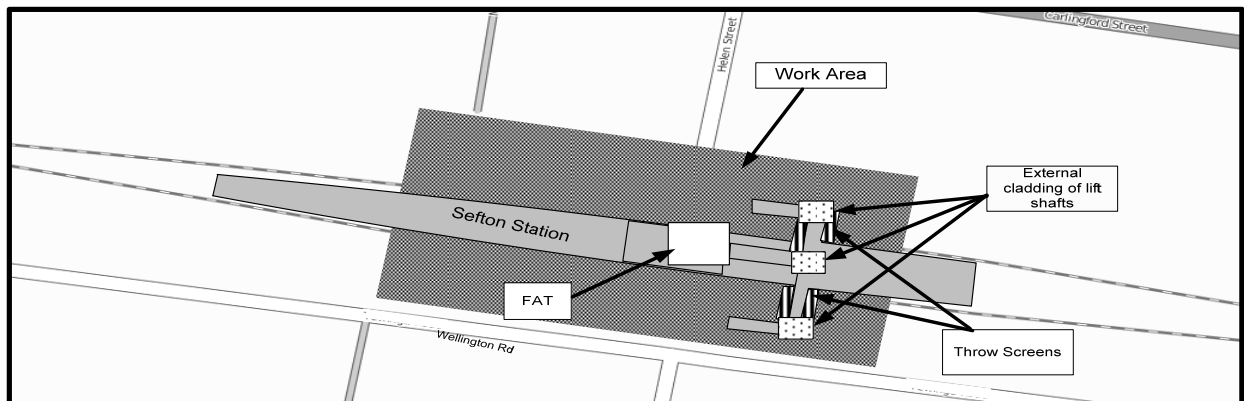

ARTC will also be undertaking construction work on Wellington Road at Sefton Station from 7am to 6pm Monday to Friday and from 8am to 1pm on Saturdays from 11 April until 1 July 2011. The work will include asphaltting the carpark on Wellington Road, as well as kerbing, guttering, constructing pavement and upgrading the pedestrian crossing.


The equipment to be used will include rollers, an excavator, a compactor, a road saw, a demolition saw, a jack hammer, and powered and non-powered hand tools. Traffic controls will be in place during this time to manage vehicular and pedestrian movements.

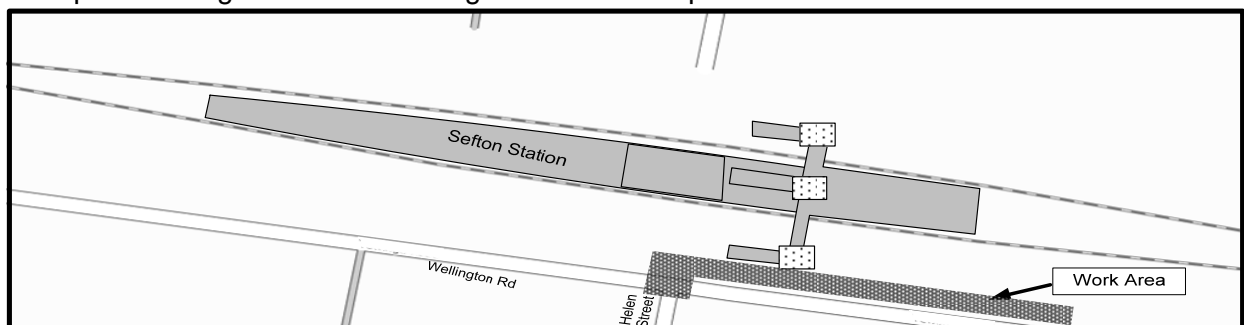

### West of Hector Street


Work in this area will include excavation and laying and backfilling of inter-track storm water drainage pipes. This work will be undertaken from 6am Saturday 9 April to 10pm Sunday 10 April 2011. The equipment used will include a 12t excavator, a tip truck, a wacker packer, concrete trucks and pumps (to be used intermittently), and powered and non-powered hand tools.

The removal of sheet piles will also be undertaken in this area from 7am to 6pm Saturday 9 April and 8am to 6pm Sunday 10 April 2011. The equipment used for this activity will include a 25t excavator, bogies and powered and non-powered hand tools.

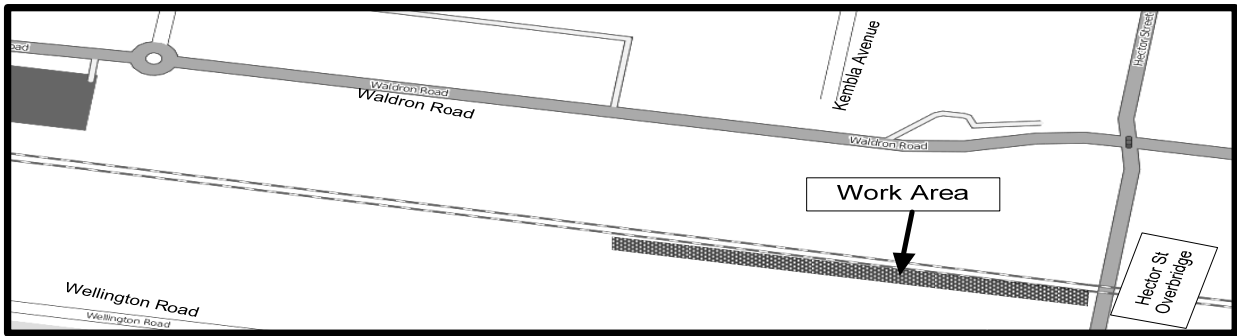


### Chester Hill Station

ARTC will be installing a signalling bungalow near Chester Hill Station from 7am to 6pm on Saturday 9 April 2011 or from 8am to 6pm on Sunday 10 April 2011. The equipment used will include site vehicles, a 100T crane, a supporting crane truck, a low loader and hand tools.

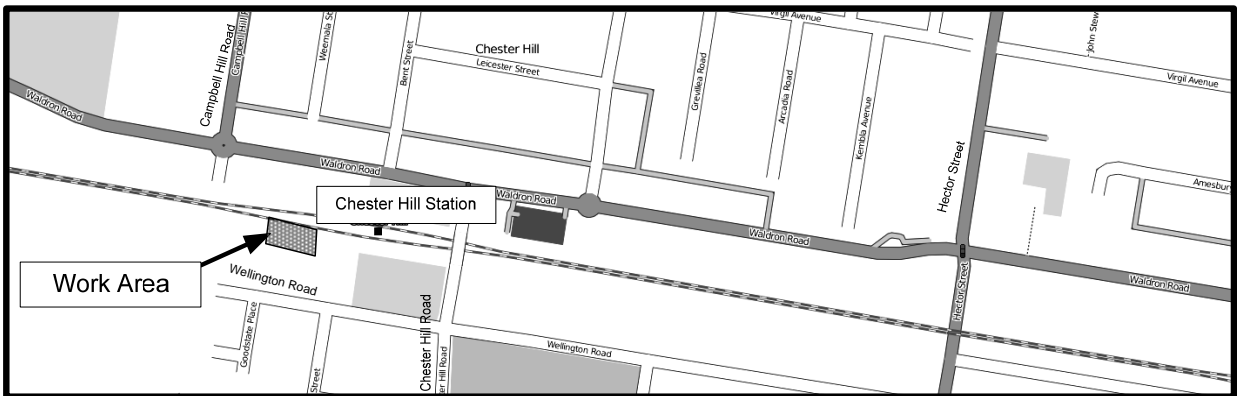

### Chester Hill Road to Campbell Hill Road, Chester Hill


Work in this area will include excavation and laying and backfilling of inter-track storm water drainage pipes. These works will be undertaken from 6am Saturday 9 April to 10pm Sunday 10 April 2011. The equipment used will include a 12t excavator, a tip truck, a wacker packer, concrete trucks and pumps (to be used intermittently), and powered and non-powered hand tools.

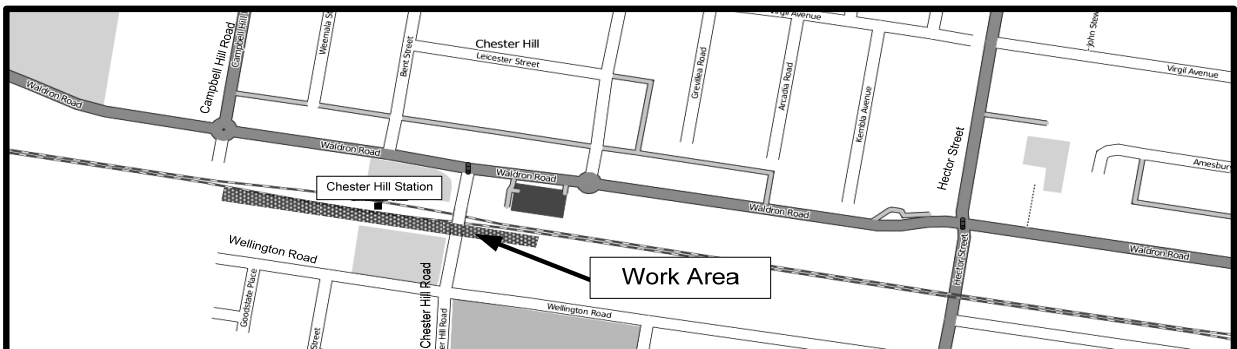

### Chester Hill Station to Woodville Road, Villawood

Work in this area will include removal and replacement of power poles. This work will be undertaken from 7am to 6pm Saturday 9 April and Saturday 16 April and from 8am to 6pm Sunday 10 April and Sunday 17 April 2011.


The equipment used will include two elevated work platforms, a pole truck with a hydraulic lift, a pot hole truck, a 12t excavator, a 40t mobile crane, a truck mounted auger, a truck and trailer, and powered and non-powered hand tools.

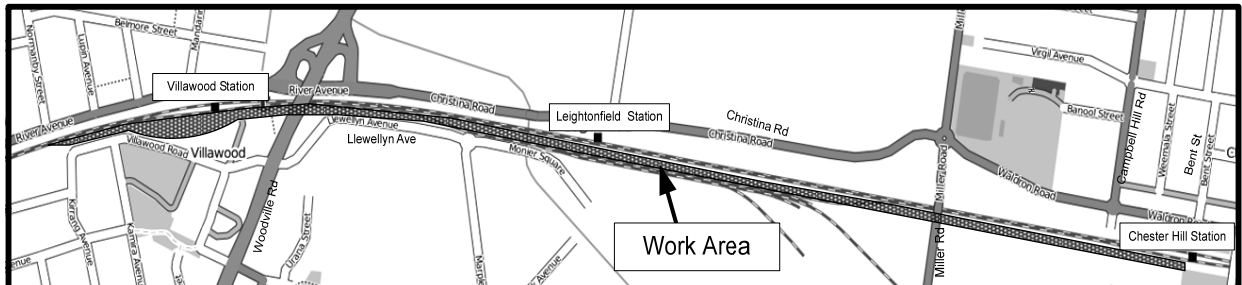

### Miller Road to Woodville Road, Villawood.

Work in this area will include removal of the existing refuge loop, reconditioning of the formation, construction of the new track and signal testing and commissioning. The work will be undertaken from 2am Saturday 9 April to 7am Monday 11 April, from 6pm Monday 11 April to 7am Tuesday 12 April, from 6pm Tuesday 12 April to 7am Wednesday 13 April and from 6pm Wednesday 13 April to 2am Thursday 14 April 2011.

The equipment used will include two 20t excavators, three front end loaders, three 14t dump trucks, six daymaker floodlights, a tamper, small track machines, hand tools, a water cart, a road sweeper and oxy sets. In addition, a rail grinder, 10t vibrating roller and rail saw will be used only during daylight hours.

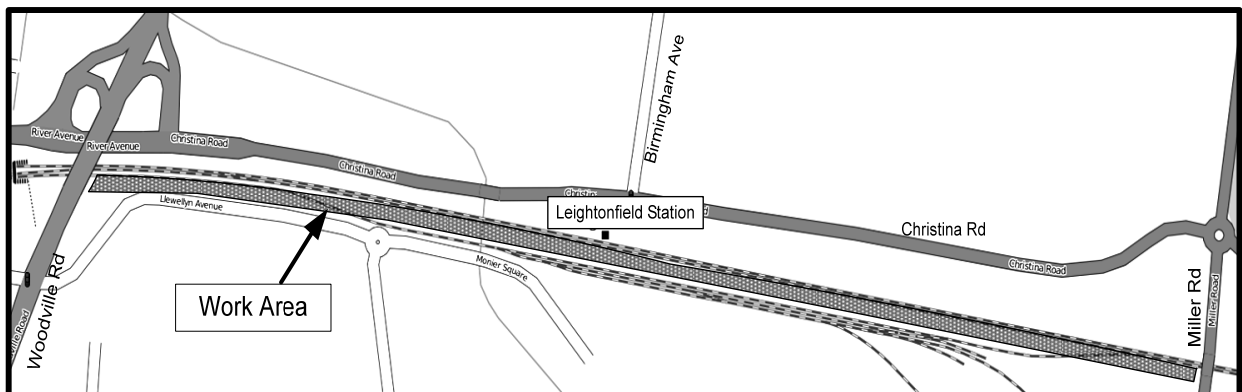

We appreciate your patience while we build this important project for Sydney, NSW and the nation.

For further information please phone our 24 Hour Information and Complaints Line on 1800 182 543 or email [ssfl@artc.com.au](mailto:ssfl@artc.com.au) or visit [www.ssfl.artc.com.au](http://www.ssfl.artc.com.au)



Translating & Interpreting Service – Please Phone: 131 450