



AUSTRALIAN RAIL TRACK CORPORATION LTD


Southern Sydney Freight Line IMPORTANT COMMUNITY INFORMATION

Construction Work at Birrong, Regents Park and Sefton

Australian Rail Track Corporation (ARTC) will be undertaking construction work at Birrong, Regents Park and Sefton. This work must be undertaken outside normal construction because there are safety risks involved with working in close proximity to the overhead wires and tracks.


Joseph Street, Birrong to Llewellyn Avenue, Villawood

Signalling commissioning will be undertaken from 2am Saturday 9 July through to 2am Monday 11 July 2011. The equipment used will include a crane truck, site vehicles and hand tools.

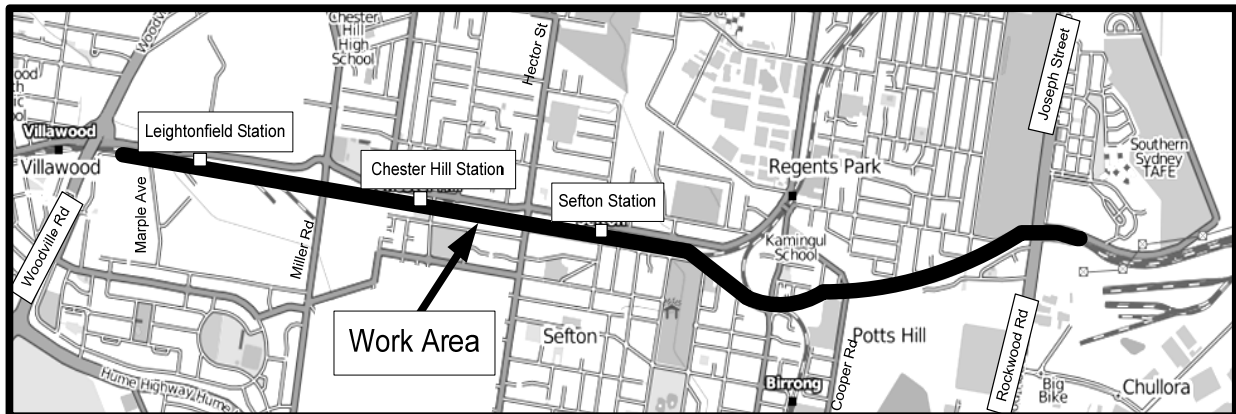


Amy Street to Dawes Avenue, Regents Park

Turnout maintenance, including retrofitting track rollers, will be undertaken on Saturday 9 July, from 7am to 6pm, and on Sunday 10 July 2011, from 8am to 6pm. The equipment used will include a 4t dumper and powered and non-powered hand tools.

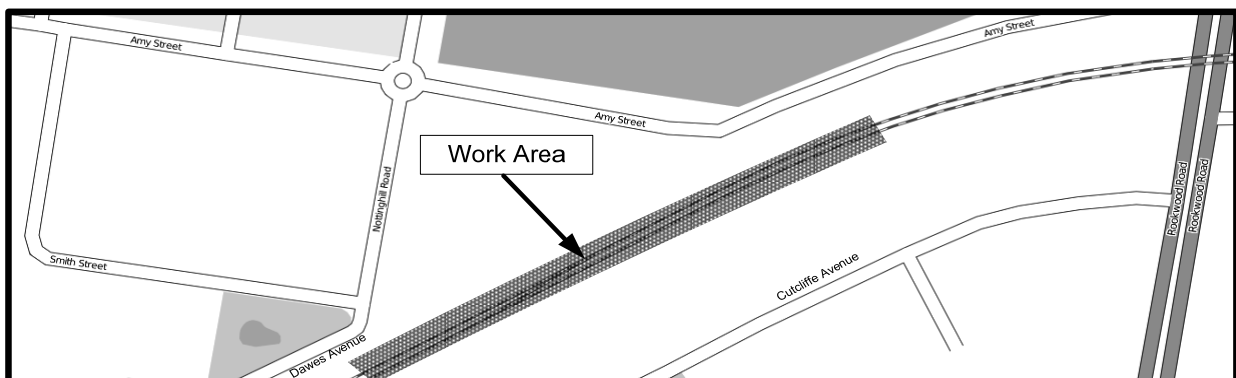


Hope Street to Auburn Road, Regents Park

Track and turnout maintenance, including installing concrete guard rails and glued insulated joints and resurfacing, will be undertaken from 2am Saturday 9 July to 12am Monday 11 July 2011. The equipment used will include three front-end loaders, four 14t dump trucks, two 15t excavators, two drotts, tamper, regulator, vibrating roller, four lighting towers, and powered and non-powered hand tools.

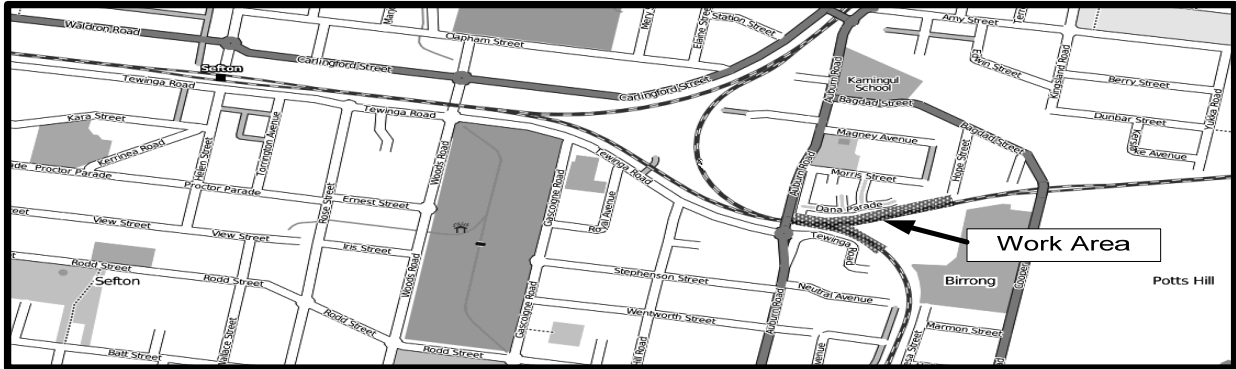


Tewinga Road, Sefton

Transformer switchover works, including minor excavation works, will be undertaken on Saturday 9 July, from 7am to 6pm, and on Sunday 10 July 2011, from 8am to 6pm. The equipment used will include a tip truck, elevated work platform, potholing truck, 3t excavator, and powered and non-powered hand tools.

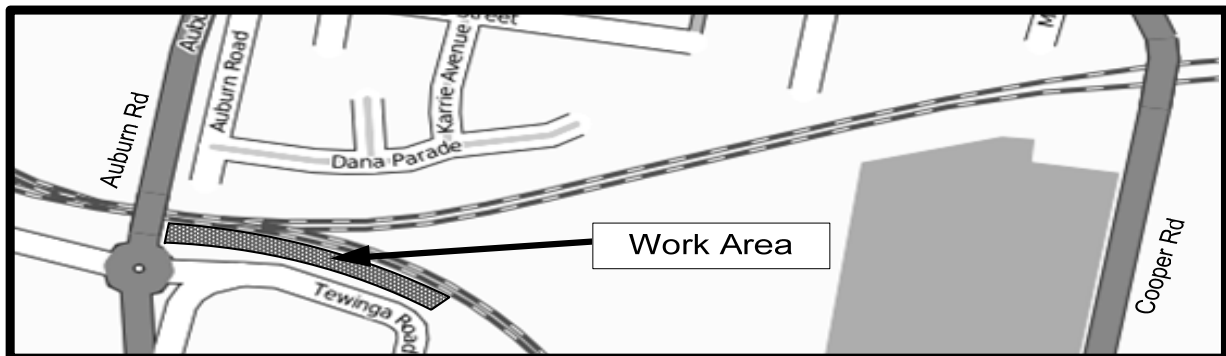


Rose Street, Sefton to Sefton Station

The removal of six power poles, and the removal of redundant aerial conductors between the power poles, will be undertaken on Saturday 9 July, from 7am to 6pm, and on Sunday 10 July 2011, from 8am to 6pm. The equipment used will include a pole and grabber truck, two 23m travel towers, a hiab tipper, 30t mobile crane, 7t mini excavator, loader, tip truck, chainsaw, and powered and non-powered hand tools.

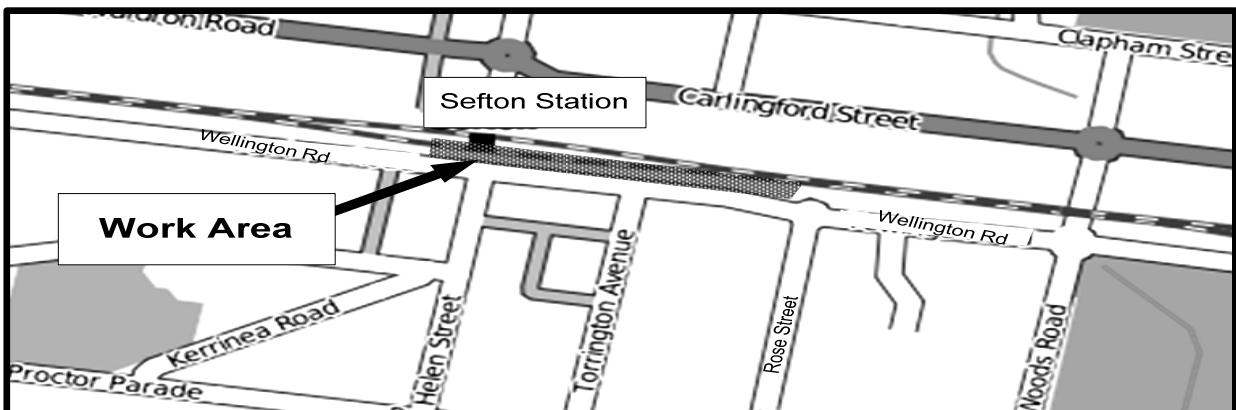

Sefton Station

Works to the pedestrian bridge, stairs and platform, and power upgrade works, will be undertaken on Saturday 9 July, from 7am to 6pm, and on Sunday 10 July 2011, from 8am to 6pm, with a contingency between 6pm and 10pm on both days. The equipment used will include delivery trucks, oxy sets, a 60t crane, 20t franna, scaffolding, an elevated work platform, a generator and both powered and non-powered hand tools.

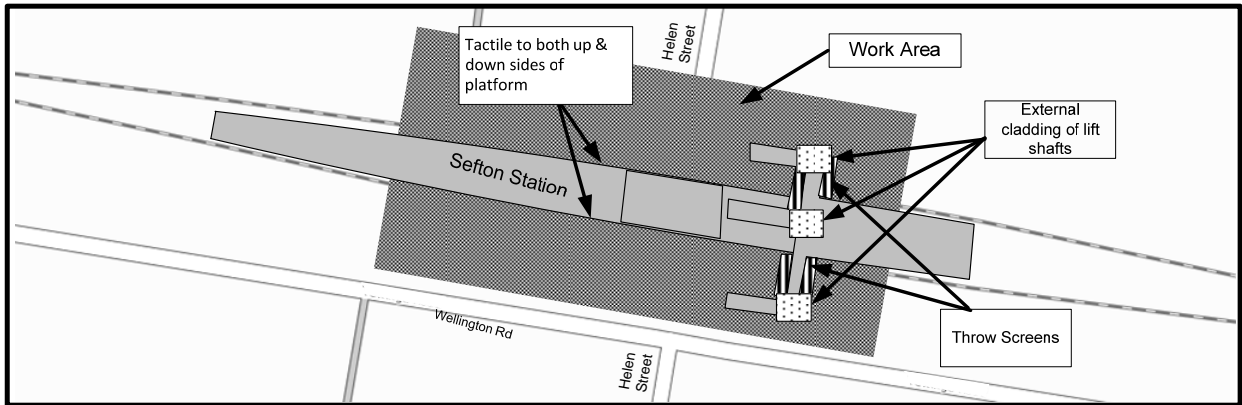

We appreciate your patience while we build this important project for Sydney and NSW.

For further information please phone our 24 Hour Information and Complaints Line on 1800 182 543 or email ssfl@artc.com.au or visit www.ssfl.artc.com.au



Translating & Interpreting Service – Please Phone: 131 450